

Studio Monitors

BEHRITONE C50A/C5A

C50A — Active 30-Watt Full-Range Reference Studio Monitor

- High-resolution, 30-Watt active nearfield monitor
- Frequency response from 90 Hz to 17 kHz with zero crossover phase distortion
- 6 ½" cube cabinet with multiple coats of high-gloss piano lacquer finish

C5A — Vintage-Style 30-Watt Active Full-Range Reference Studio Monitor

- Vintage-style studio monitor modeled after a famous model from the 70's
- 6 ½" cube cabinet with detachable acoustic foam and attractive wood laminate

Common features:

- High-end 30-Watt Class-D amplifier built-in to perfectly match the speaker's performance
- Full-range 5 ¼" speaker with special diaphragm and deformation-resistant chassis
- Homogeneous dispersion pattern due to singular small-diaphragm full-range driver configuration
- Magnetic shielding allows placement near computer monitors
- Precision-milled, high-rigidity MDF cabinet and baffle for minimal resonance
- ⅝" microphone stand mount built into the cabinet base



BEHRITONE C5A and C50A full-range reference studio monitors let you hear what your mixes will sound like on real-world systems such as car stereos, computers, televisions, iPod stations and other bass-challenged systems. Each 6.5" cube contains its own dedicated 30-Watt Class-D power amp and a specially designed 5-¼" full-range speaker for crystal-clear audio reproduction. Both models accept balanced XLR and ¼" TRS, as well as unbalanced RCA connections, and are magnetically shielded so they won't disrupt your computer video monitors.

Beauty is More Than Just Skin-Deep

BEHRITONE loudspeakers are our homage to a now-defunct company and their legendary 5C loudspeakers, which literally shook up the recording industry in the 1970s and '80s. The original versions were passive little

vinyl-clad, particle-board cubes that recording engineers soon came to love. The C50A features a high-gloss piano lacquer finish, while the C5A sports a classic wood-grain laminate, allowing either model to fit into virtually any studio décor. Both are constructed of precision-milled, high-rigidity MDF for extremely low-resonance performance. A neoprene pad is included for superior acoustic isolation when the speakers are placed on a desktop, or the enclosures can be mounted on mic stands via the built-in ⅝" adapters.


Discover what world-class studio and mastering engineers have known for decades—the only way to get the TRUTH about your mix is to hear it through these pint-sized beauties. BEHRITONE C5A or C50A active studio monitors are the perfect complement to your current monitoring system.



BEHRITONE C50A/C5A


- 1/4" soft neoprene pad to serve as an acoustic isolator
- Servo-balanced XLR, 1/4" TRS and RCA input connectors plus gain control for precise calibration in stereo setups
- High-quality components and exceptionally rugged construction ensure long life
- Conceived and designed by BEHRINGER Germany

C50A & C5A Rear Panel

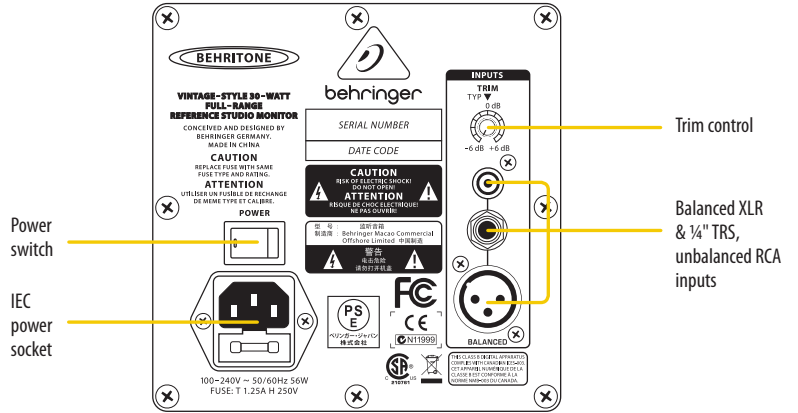


C50A Front View

* 5/8" microphone stand mount built into cabinet base (not shown)

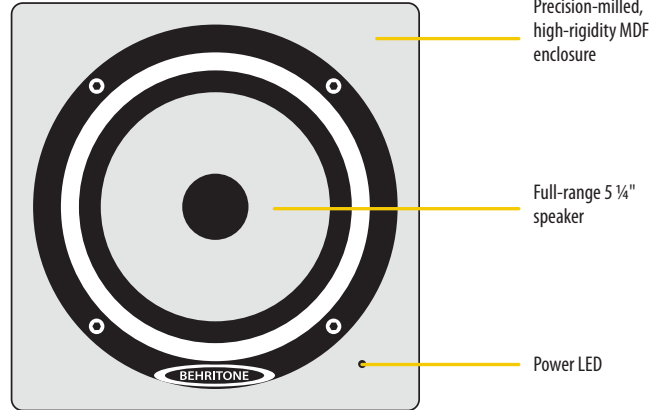


C5A Front View

* 5/8" microphone stand mount built into cabinet base (not shown)

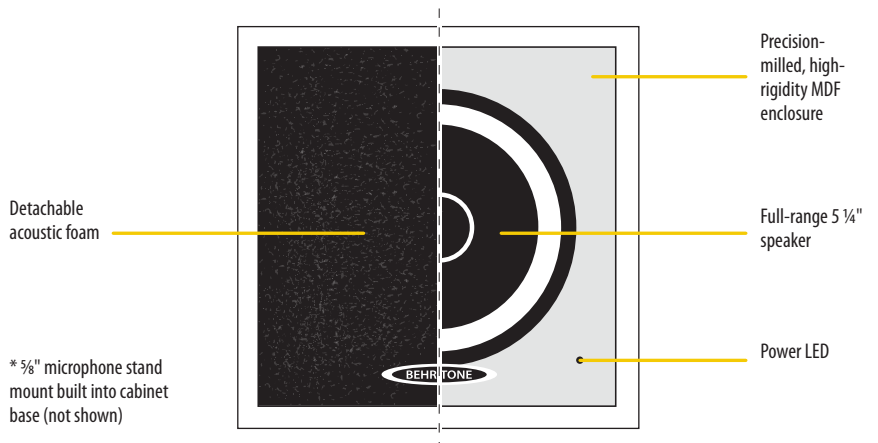


BEHRITONE C50A/C5A

C50A Recording Setup

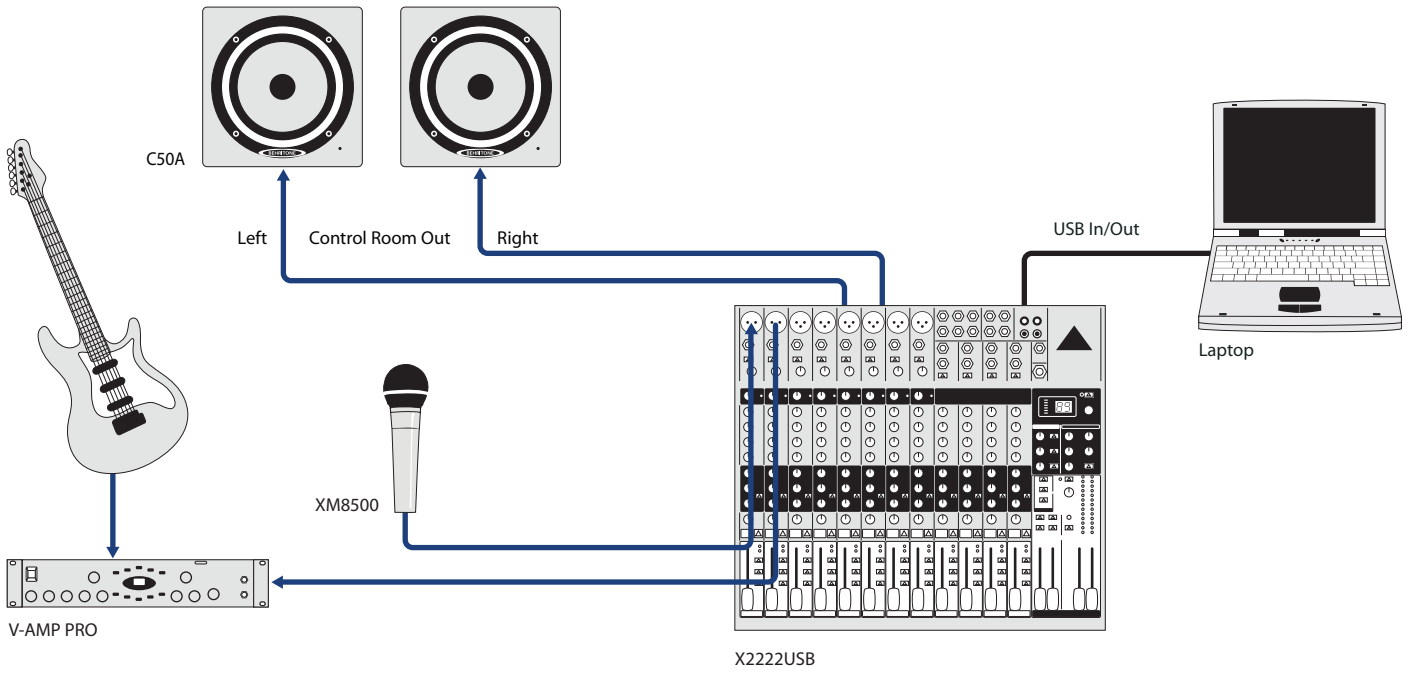

Computer Setup

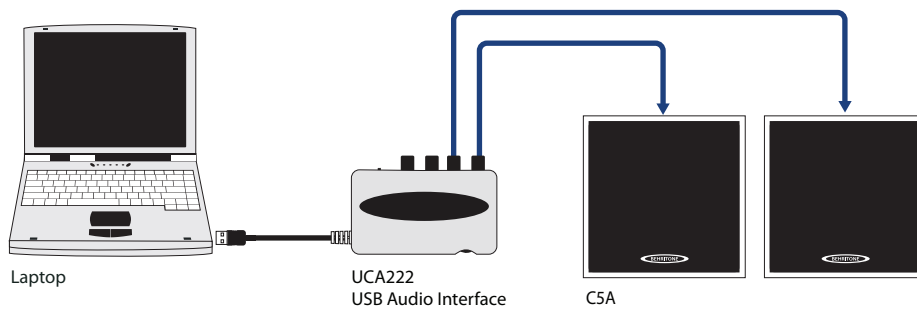

BEHRITONE C50A/C5A

Specifications

C50A/C5A

Audio Inputs

XLR connector	Balanced input
¼" TRS	Balanced input
RCA	Unbalanced input
Input impedance	10 kΩ
Input trim	-6 dB to +6 dB
Max. input level	+20 dBu

Transducer

Full-range driver	5 ¼" speaker
-------------------	--------------

Amplifier Output Power

RMS @ 0.1 % THD (sine wave)	30 W @ 8 Ω
Peak power	36 W @ 8 Ω

C50A

System Specification

Frequency range	90 Hz to 17 kHz
-----------------	-----------------

C5A

System Specification

Frequency range	150 Hz to 15 kHz
-----------------	------------------

C50A/C5A

Power Supply

Fuse

100 - 240 V~, 50/60 Hz	T 1.25 A H 250 V
Power consumption	56 W
Mains connection	Standard IEC connector

C50A

Dimensions/Weight

Dimensions (H x W x D)	6.5 x 6.5 x 7.8" 165 x 165 x 197 mm
Weight	7.71 lbs / 3.5 kg

C5A

Dimensions/Weight

Dimensions (H x W x D)	6.49 x 6.49 x 7.87" 165 x 165 x 200 mm
Weight	7.27 lbs / 3.3 kg

Please note these specifications are preliminary and conceptual in nature, and as such are subject to change as product development progresses. This information is supplied for market research purposes only and is not to be made public in any manner. This document is solely the property of The MUSIC Group, or one of its subsidiaries, and must be surrendered upon request of the owner.

For service, support or more information contact the BEHRINGER location nearest you:

Europe
MUSIC Group Services UK
Tel: +44 156 273 2290
Email: CARE@music-group.com

USA/Canada
MUSIC Group Services NV Inc.
Tel: +1 702 800 8290
Email: CARE@music-group.com

Japan
MUSIC Group Services JP K.K.
Tel.: +81 3 6231 0454
Email: CARE@music-group.com

Technical specifications and appearances are subject to change without notice and accuracy is not guaranteed. BEHRINGER is part of the MUSIC Group (music-group.com). All trademarks are the property of their respective owners. MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein. Colors and specifications may vary from actual product. MUSIC Group products are sold through authorized fulfillers and resellers only. Fulfillers and resellers are not agents of MUSIC Group and have absolutely no authority to bind MUSIC Group by any express or implied undertaking or representation. This manual is copyrighted. No part of this manual may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording of any kind, for any purpose, without the express written permission of MUSIC Group IP Ltd. ALL RIGHTS RESERVED. © 2012 MUSIC Group IP Ltd. Trident Chambers, Wickhams Cay, P.O. Box 146, Road Town, Tortola, British Virgin Islands. 985-10000-00492