


# PA-4040MPX - Pre-Amplifier



**4-zone mixer**, for general multiroom PA applications.

- 4 zones with routing facility of all input channels as desired
- 3 inputs microphone/line via comb. jacks
- 2 inputs line stereo via RCA jacks
- Each input channel with gain control, 2-way tone control and zone routing switch
- Microphone inputs with +15V phantom power, to be switched on as required
- Priority function for channels 1-3, switchable
- Independent paging input, can be routed to each zone
- 4 zone outputs, can be adjusted individually
- Connection for monitor speaker
- Level control via zone VU meter and monitor VU meter
- Adjustable headphone output
- Mains operation or 24V emergency power operation

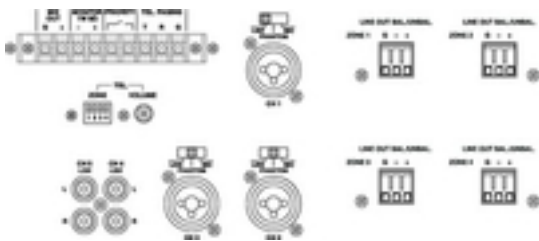

## Technical data

|                       |   |
|-----------------------|---|
| Mic/line 1-3          | : 5mV/4k Ohm,100mV/10k Ohm              |
| Line 4-5              | : 100mV/30k Ohm                         |
| Telephone paging      | : 40mV/5k Ohm                           |
| Line (zone)           | : 1.7V, bal.                            |
| Line (mix out)        | : 3.95V                                 |
| Monitor speakers      | : 8 Ohm/1W                              |
| Frequency range       | : 50-17,000Hz                           |
| Bass                  | : $\pm 10$ dB/100Hz                     |
| Treble                | : $\pm 10$ dB/10kHz                     |
| Mic                   | : > 65dB                                |
|                       | : > 75dB                                |
| THD                   | : < 1%                                  |
| Admiss. ambient temp. | : 0-40 °C                               |
| Power supply          | : 230V~/50Hz/20VA,24V DC current /600mA |
| Dimensions            | : 482x133x220mm, 3RS                    |
| Weight                | : 4.5kg                                 |