



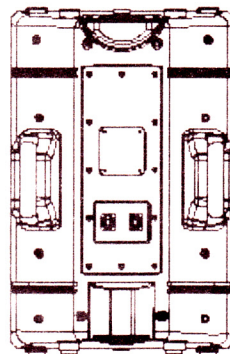

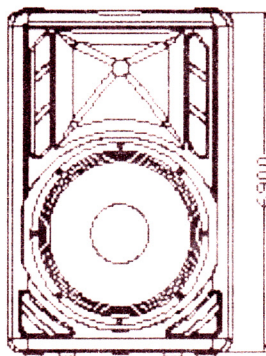


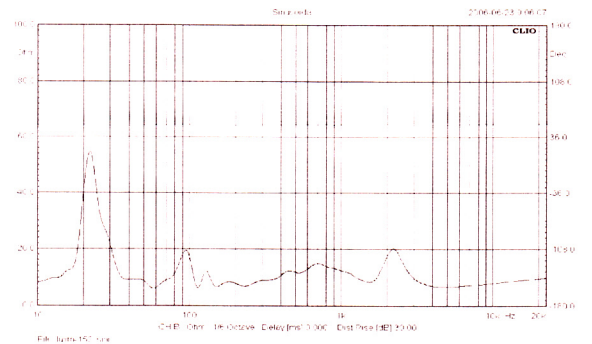

BlueTech

**SPECIFICATION SHEET**

<b>MODEL</b>	LUX-152
<b>APPLICATION</b>	
<b>FEATURE</b>	
Components	15"woofer+1.5"driver
Frequency Response (Hz)	40-20k
Impedance (OHM)	8
RMS Power (W)	500
Program Power (W)	1000
Dispersion (@6dB)	H90° × V30°×45°
Sensitivity (1w/1m) (dB)	99
Max SPL (dB)	129
X-over (Hz)	2000
Connection	Speakon
Flying Points	4×M10
Product Size (cm)	71×45×35
Product Weight (kg)	16
Shipping Carton Size (cm)	76.5×50×39
Gross Weight (kg)	18.5
Passive/Active	Passive

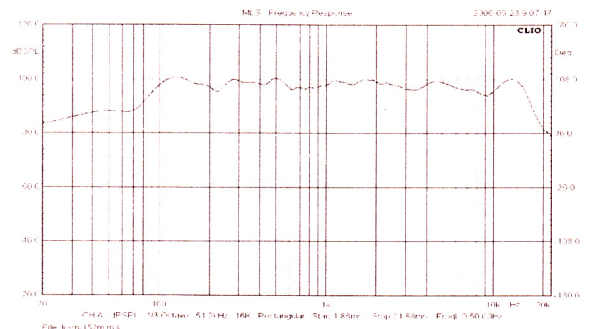

(\* )2hours in free air according to AES2-1984(r2003)