



FOS Ribbon Driver



User's Manual

INTRODUCTION

Thank you for purchasing this Ribbon Driver 800. The unit is designed for LED strip light. Please read this user manual carefully before use.

What is included

- 1pc Ribbon Driver 800
- 1pc Power cord ▪ 1pc User Manual

Safety Instruction



WARNING!!! To reduce the risk of fire, electric shock, or injury to persons, follow these important safety instructions:

- This product is intended for indoor use only!
- Always turn off, unplug power and allow fixture to cool before servicing.
- Ensure that fixture is properly grounded.
- Please keep this User Guide for future consultation.
- To prevent risk of fire or shock, do not expose fixture to rain or moisture. ▪ The unit must be installed in a location with adequate ventilation, at least 50cm from adjacent surfaces. Be sure no ventilation slots are blocked.
- Make sure power cord is never crimped or damaged.

FEATURES

- Flicker free for film or video
- 4 working modes: DMX, Auto, Sound, Master/Slave
- 5 DMX modes: 3ch, 4ch, 6ch, 12ch, 16ch
- 4 output ports and each port can be addressed individually
- 18 preset colors with linear dimmer
- 6 built-in programs with various speeds
- 3 sound programs with adjustable sound sensitivity
- 16 x 2 digits LCD display

SETUP

Mounting


Truss/ceiling /wall mounting are available for this small controller.

IMPORTANT!!! Safety cables must always be used. The safety cable must be capable of holding 10 times the weight of the fixture.

AC Power

The fixture is designed to work on 110V/230V 50Hz. Before applying power to a unit, check that the source voltage matches the unit's requirement.

Connection

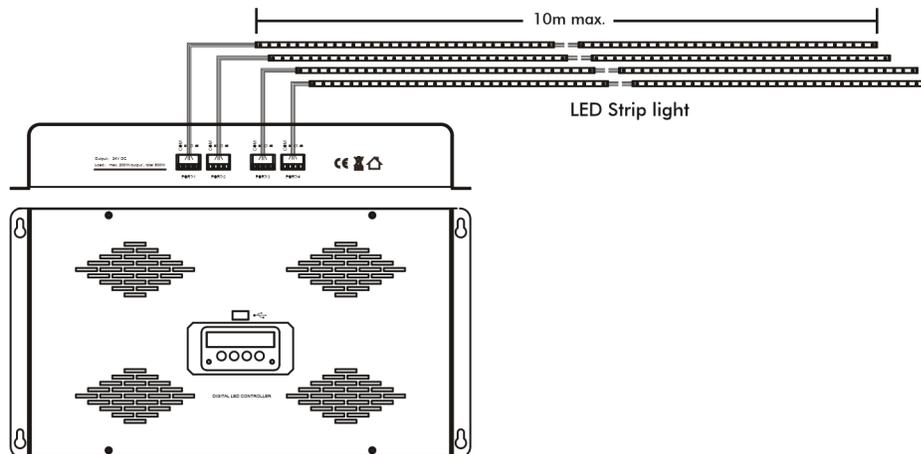


Connect the wires of LED strip to terminator of Ribbon Driver correctly base on color code of wire.

OPERATION INSTRUCTIONS

This fixture offers 4 working modes: DMX, Auto, Sound and M/S.

1. Connect the fixtures to main power supply.
2. Turn on power switch and LED indication on Control Panel is lit up.
3. Wait for some seconds till system is ready.
4. Press buttons to continue.

Menu Map

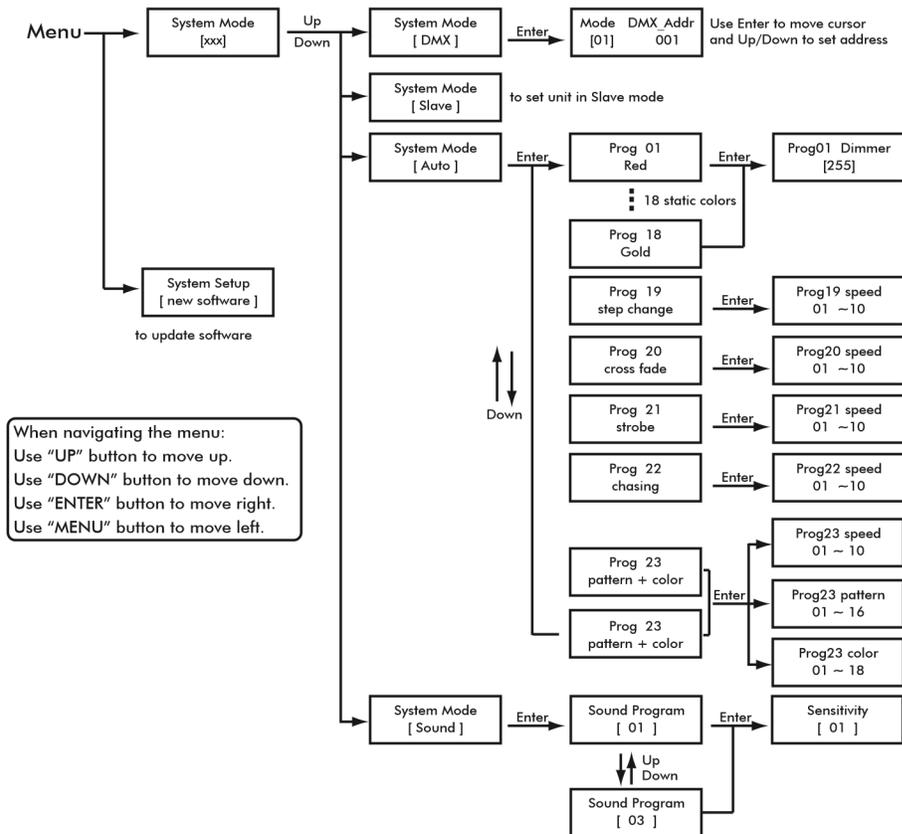

► System Setup [new software]

This mode is designed for factory to upload software through USB port. Your product has been tested before shipment. Just check local distributor's web site if updated software is available.

► System Mode [xxx]

Press MENU button till display reads "System Mode [XXX]", then use UP/DOWN button to scroll through" DMX, Slave, Auto, Sound.

► DMX Mode

The unit can be operated in 3ch, 4ch or 6ch. Set DMX address according to the DMX mode selected.

► Master/Slave Mode

For large venue, multiple systems can be run in sync as Master/Slave. Use DMX cables to link the Drivers together.

1. One of Ribbon Driver 4 in the daisy chain is to be set as Master and this Master must work under Auto or Sound mode.
2. Other drivers are to be set in Slave mode.
3. Operate the Master Driver in Auto and Sound mode to run the whole system.

Technical Specifications

Power Input: AC110V/230V 50-60Hz

Output voltage: DC 12V or 24V Load: 200W/port, total 800W max.

Fuse: F5A/250V

Dimension: 436*235*62 mm

Weight: 5.5 kg

IMPORTANT INFORMATION!

In order to optimize the recovery and recycling of the materials that old appliances contain and reduce the impact on human health and the environment, ensure that this product is recycled at the end of its life.



DMX mode 1: 3 Channels

Channel	Value	Function
1	0-255	Red Intensity 0-100%
2	0-255	Green Intensity 0-100%
3	0-255	Blue Intensity 0-100%

DMX mode 2: 4 Channels

Channel	Value	Function
1	0-152	Master dimmer 0-100%
	152-242	Strobe from slow to fast
	243-255	Open
2	0-255	Red Intensity 0-100%
3	0-255	Green Intensity 0-100%
4	0-255	Blue Intensity 0-100%

DMX mode 3: 6 Channels

Channel	Value	Function
1	0-255	Red Intensity 0-100%
2	0-255	Green Intensity 0-100%
3	0-255	Blue Intensity 0-100%
4	0-255	Strobe from slow to fast
5	0-001 002-255	No function Built-in programs
6	0-255	Master dimmer 0-100%

DMX mode 4: 12 Channels

Channel	Value	Function
1	0-255	Port 1 Red Intensity 0-100%
2	0-255	Port 1 Green Intensity 0-100%
3	0-255	Port 1 Blue Intensity 0-100%
⋮	⋮	⋮
10	0-255	Port 4 Red Intensity 0-100%
11	0-255	Port 4 Green Intensity 0-100%
12	0-255	Port 4 Blue Intensity 0-100%

DMX mode 5: 16 channels

Channel	Value	Function
1	0-152	Port 1 Master dimmer 0-100%
	152-242	Port 1 Strobe from slow to fast
	243-255	Port 1 Open
2	0-255	Port 1 Red Intensity 0-100%
3	0-255	Port 1 Green Intensity 0-100%
4	0-255	Port 1 Blue Intensity 0-100%
⋮	⋮	⋮
13	0-152	Port 4 Master dimmer 0-100%
	152-242	Port 4 Strobe from slow to fast
	243-255	Port 4 Open
14	0-255	Port 4 Red Intensity 0-100%
15	0-255	Port 4 Green Intensity 0-100%
16	0-255	Port 4 Blue Intensity 0-100%