LSI-30RGB-5050-IP20-5M

05415

Description

Flexible "color changing" led strip containing 30 RGB leds/meter.

Features

- Flexible "color changing" led strip containing 30 RGB leds/meter.
- IP20 rated, perfect for indoor use and installation in aluminium profiles (optionally available).
- Total length = 5m: can be easily cut to size on the markings: this version with 30LEDS/meter has markings for cutting every 16.7cm.
- Can be easily bended to follow the curves of any surface
- Equipped with self-adhesive 3M®-tape on the backside for easy installation on any surface
- High output and perfect color mixing thanks to the use of carefully selected 3in1 SMD LEDs ("Epistar" brand)
- 24V version: less current and less heat production for longer life!
- Wires on both sides for easy connection.
- **Also 20m rolls available: faster installation and less waste pieces !**

- LED Type: SMD5050 3in1 RGB
- LED Quantity: 30 LED / m
- Power consumption: 7.2 W /m
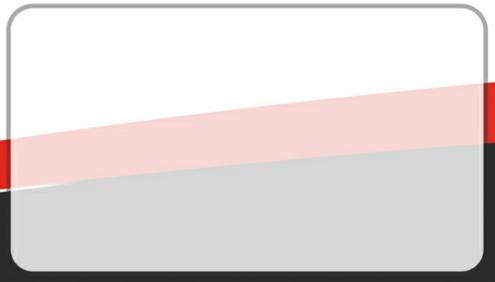- Light output (white): 270 lm/m
- Cutting distance: 16.7 cm

JBSYSTEMS

Specifications

General : Application	Architectural, Commercial lighting
General : Dimensions (cm)	500
General : Weight (kg)	0.12
General : Powerinput	24Vdc
General : Energy Label	A+
General : Power consumption W	-
General : Color	white
General : Display	none
General : Fixation	-
General : IP rating	indoor
Control : manual	No
Control : Master/Slave	No
Control : DMX M/S	No
Control : Standalone	no
Control : Type included remote	-
Control : optional remote	-
Control : programmable	No
Control : upgradable software	No
Control : maximum DMX channels	-
Light : lamp socket	none
Light : Lux	-
Light : lumen	-
Light : lamp	LED
Light : min. color temperature (K)	-
Light : max. color temperature (K)	-
Light : CRI	-
Light : colors	RGB
Light : mix colors	No
Light : fixed gobos	-
Light : rotating gobos	-
Light : focus	None
Light : zoom	None
Light : iris	No
Light : prism (# facets + rotating y/n)	-
Light : frost filter	No
Light : min. beam angle (°)	-
Light : max. beam angle (°)	-
Connections : input	-
Connections : output	-
Connections : XLR 3 pin	No
Connections : XLR 5 pin	No
Connections : rca	No
Connections : jack	No
Connections : Power Conn.	No
Connections : hdmi	No
Connections : midi	No
Connections : usb	No
Connections : wifi	no
Connections : bluetooth	No
Connections : artnet	No
Connections : rdm	No
Brand	JB SYSTEMS
EANCode	5420025654159
Discontinued	No

JBSYSTEMS